


Product Specifications

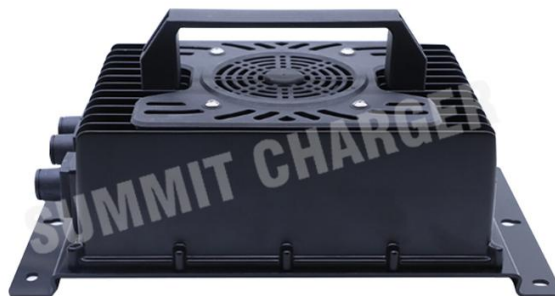

Color: Silver

Basic parameters

Name	Fully enclosed variable frequency charger
Brand	Summit Charger
Model	SMCN20-1.2kW
Battery parameters	Battery type & Series number ? Nominal voltage ?V Max output voltage ?V; Max ?V/cell Capacity ?Ah
Cooling way	Air Cooling
Size	L335mm* W 192mm* H 106mm
Net weight	4.5 kg
Efficiency	>93%
IP	66
Certification	UL
Working temperature	- 20 — 85 ℃
Protective properties	1.Output over voltage protection; 2.Output over current protection; 3. Output short circuit protection; 4.Output reverse protection; 5. Over temperature protection of charger.
Warranty	12 months

Specific parameters

Input	Rated input voltage	AC90-264V Single-phase three-wire system
	Waveform	Sine wave
	Frequency	40-70 Hz




	Input current	≤10A		
	Power factor	0.99@220VAC full load		
	Input connectors	US Plug(Optional)		
	Input cable	1.4m		
	Others	/		
	Model No.	AC Input Voltage	Rated-Max output voltage	Max Output current
	SMCN20-2425A	AC90-264V	24V~33V Max	25A
	SMCN20-3625A		36V~49.5V Max	25A
	SMCN20-4820A		48V~66V Max	20A
	SMCN20-6020A		60V~82.5V Max	20A
	SMCN20-7215A		72V~99V Max	15A
	Output power limit	1400W		
Output	Output connectors	DC SC50(Optional)		
				
	Output cable	1.5m		
Extended Functions	Others	/		
	CAN	Optional, CAN 2.0B-250kbps or 500kbps;		
	485	NO		
	12V Auxiliary power	NO		
	CP	NO		
	CC	NO		
	High voltage interlock function	NO		
	Charging lock	Optional		
	Bluetooth	NO		
	External Indicator	Optional		
	Built in Indicator	YES		
	Handle	Optional		
	External program replacement interface	NO		
Package &		Carton size : 36*30*25cm		




萨美特电源
SUMMIT POWER

Delivery Gross weight : 4.5kg
Sample Lead time: 5-8 days

Installation dimensions

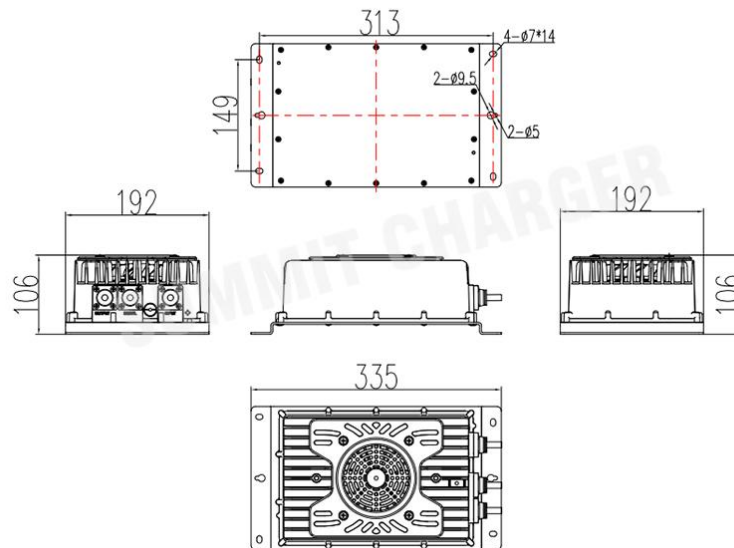

Pictures

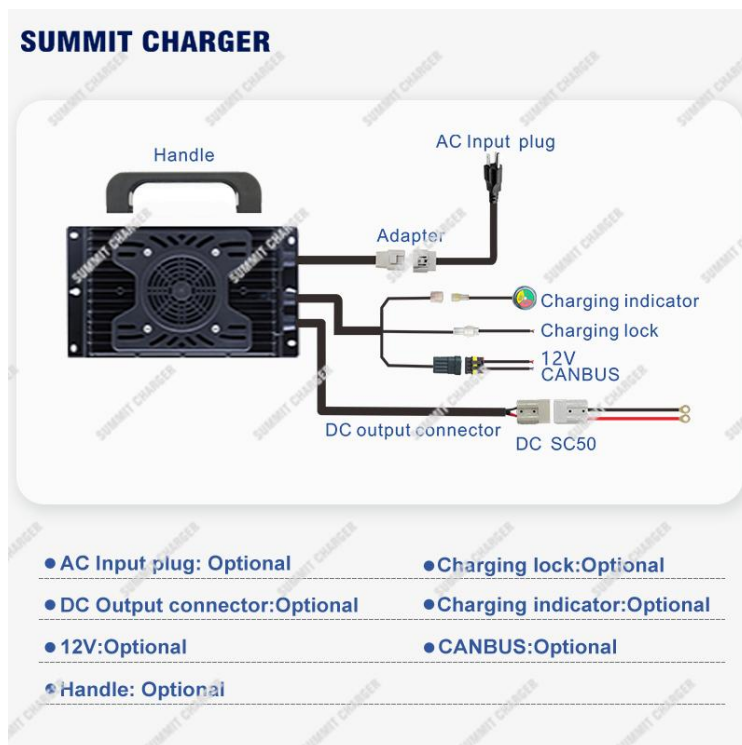

Contact: Cecile Chen
Company: Sichuan Summit Power Co., Ltd
TEL/WhatsApp/Wechat: +86 18581533864
Email: sales02@summitcharger.com

No text below.